Requirements of procurement logistics
Coils

	Despatch unit
Picture	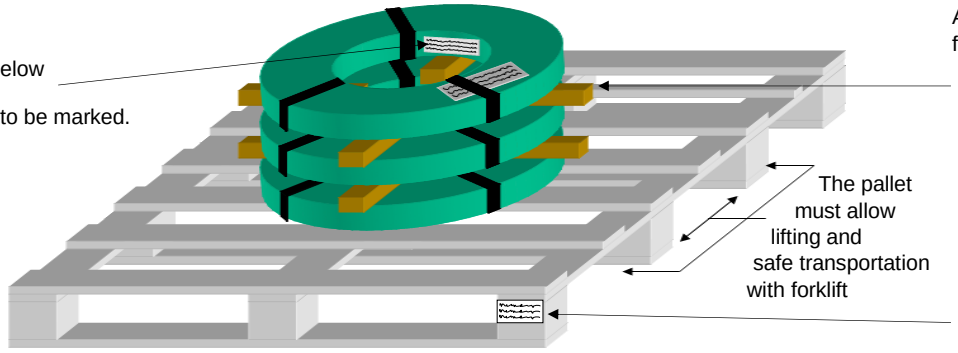
Description	► For special or non-returnable pallet, the items listed under 2.7 of Requirements of procurement logistics apply ► Wooden bars at least 20mm thick must be placed between rings as spacers ► Condition of pallets to qualtiy classification EPAL new or condition A or B. ► Europool pallet with max. 1,000kg total weight ► Supplied in lying condition on Europool pallets and secured against slipping out of place ► Less than 3mm material thickness: Inner diameter 400mm, outer diameter 650-780mm, considering the max. weight per coil of 120kg ► More than 3mm material thickness: inner diameter 500mm, outer diameter 950-1.200mm including packaging, distance pieces, load securing etc.. ► Load centrally on pallet ► Protrusions are not acceptable with Europallets. ► The rings have to be fixed at at least 3 spots with suitable fixation bands Other forms of delivery can only be used upon written agreement of E-T-A.
Marking	**Aspect exceeding the standard of our Requirements of Procurement Logistics** Each individual ring has to be permanently marked at the inner side with a label The label must contain the following information: □ E-T-A part number □ Manufacturer/supplier □ dimensions □ Material code with strength indication □ Manufacturing code or batch number □ net weight (individual ring)